

University of Groningen

Effects of gear, imposed resistance and crank mode on the mechanical efficiency and physiological parameters during sub-maximal handcycling in healthy men

Kraaijenbrink, Cassandra; Vegter, Riemer; Hensen, Alexander H R; Wagner, Heiko; van der Woude, L. H. V.

Published in:
Journal of Science and Cycling (JSC)

DOI:
[10.28985/jsc.v6i3.355](https://doi.org/10.28985/jsc.v6i3.355)

IMPORTANT NOTE: You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.

Document Version
Publisher's PDF, also known as Version of record

Publication date:
2017

[Link to publication in University of Groningen/UMCG research database](#)

Citation for published version (APA):

Kraaijenbrink, C., Vegter, R., Hensen, A. H. R., Wagner, H., & van der Woude, L. H. V. (2017). Effects of gear, imposed resistance and crank mode on the mechanical efficiency and physiological parameters during sub-maximal handcycling in healthy men. In *Journal of Science and Cycling (JSC)* (pp. 43-44) <https://doi.org/10.28985/jsc.v6i3.355>

Copyright

Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

The publication may also be distributed here under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license. More information can be found on the University of Groningen website: <https://www.rug.nl/library/open-access/self-archiving-pure/taverne-amendment>.

Take-down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.

Effects of gear, imposed resistance and crank mode on the mechanical efficiency and physiological parameters during sub-maximal handcycling in healthy men

Kraaijenbrink, C.^{1,2}, Vegter, R.¹, Hensen, A.¹, Wagner, H.², Woude, LVD.^{1,3}

Introduction

Handcycling is an important alternative to the manual wheelchair, especially for daily outdoor transportation. An add-on handcycle is often used and has multiple gears, so that higher speed and longer distances can be reached. Initially, the handcycle was based on bicycle technology and had an asynchronous crank mode (asyn). Nowadays, they are all equipped with a synchronous crank mode (syn) (Hettinga et al., 2010; van der Woude, Dallmeijer, Janssen, & Veeger, 2001). The aim of this study was to investigate the effects of gear, imposed resistance and crank mode on the mechanical efficiency and physiological parameters. We hypothesize that a lower gear (higher cadence), a higher resistance and an asynchronous crank mode are more straining in sub-maximal handcycling.

Methods

Twelve non-disabled men rode in an instrumented handcycle on a motorized treadmill at 1.94 m/s. We changed the gear, imposed resistance and the crank mode, all in a counterbalance order. The participants handcycled three sessions in each crank mode. Across the three sessions, we changed the resistance (PO1: 15.9 ± 3.4 W, PO2: 26.2 ± 4.1 W and PO3: 36.2 ± 3.7 W). Every session consisted of three blocks of four minutes exercise, over which we changed the gear (1: 70 rpm, 2: 60 rpm, and 3: 52 rpm). Oxygen uptake (VO₂, ml/min), carbon dioxide output (VCO₂, ml/min), and heart rate (HR, bpm) were continuously measured (Cosmed Quark CPET, Cosmed, Rome, Italy). The mechanical efficiency (ME, %) was calculated according the following equation:

$$ME(\%) = \frac{PO_{syn}}{Energy\ Expenditure} \cdot 100\% = \frac{2 \cdot F_{tan,syn} \cdot v_{linear,syn}}{((4.94 \cdot VCO_2/VO_2 + 16.04) \cdot VO_2)/60} \cdot 100\%$$

To ensure steady state, we calculated mean ME, VO₂, and HR over the last minute of every block. The effects were analyzed with a repeated measures ANOVA ($P < 0.05$) with gear, resistance and crank mode as within-subject factors (SPSS 24, SPSS Inc., Chicago, Illinois, USA).

Results

The mechanical efficiency is lowest when handcycling with a high cadence, a low resistance and with an asynchronous crank mode (figure 1, left). The heart rate and oxygen uptake increase with an increase in cadence and resistance, which is more prominent in the asynchronous mode (figure 1 middle, right). Gear, resistance and crank mode all have a large significant effect on the physiological parameters during sub-maximal handcycling and interaction effects with crank mode are found (table 1).

Discussion and Conclusions

Based on the results, we suggest that a low cadence (Gear 3: 52 rpm) with a higher resistance is more efficient, especially with a synchronous crank mode. In agreement with the literature, we suggest that asynchronous handcycling is more straining, due to the stabilization of the trunk

(Dallmeijer, Ottjes, de Waardt, & van der Woude, 2004). There is an extra need for control of the front fork motion in this crank mode, since steering is not allowed on a treadmill.

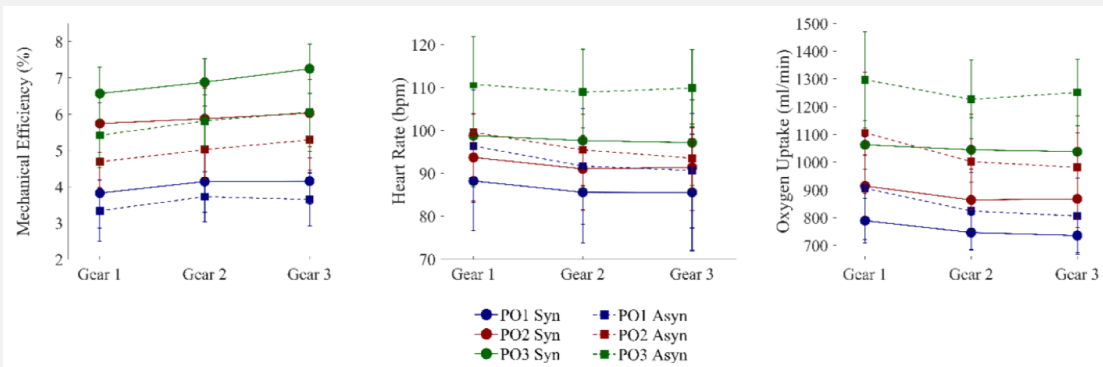


Figure 1. The mean value and the standard deviation ($n = 10$) are given for ME, HR and VO₂ for all 18 conditions.

Table 1: Results repeated measures ANOVA

$n=10$		ME (%)	HR (bpm)	VO ₂ (ml/min)
Gear	$F(df)$	13.16 (2,18)	14.71 (1.09,9.81) [†]	27.51 (1.26,11.35) [†]
	P value	<0.001*	0.003 [†] *	<0.001 [†] *
	η^2_p	0.59	0.62 [†]	0.75 [†]
Resistance	$F(df)$	98.26 (2,18)	25.11 (2,18)	77.55 (2,18)
	P value	<0.001*	<0.001*	<0.001*
	η^2_p	0.91	0.74	0.90
Crank mode	$F(df)$	44.29 (1,9)	29.96 (1,9)	28.81 (1,9)
	P value	<0.001*	<0.001*	<0.001*
	η^2_p	0.83	0.77	0.76
Gear*Resistance	$F(df)$	0.78 (4,36)	2.13 (4,36)	2.31 (4,36)
	P value	0.545	0.098	0.077
	η^2_p	0.08	0.19	0.20
Gear*Crank mode	$F(df)$	0.77 (2,18)	4.97 (2,18)	7.82 (2,18)
	P value	0.477	0.019*	0.004*
	η^2_p	0.08	0.36	0.465
Resistance*Crank mode	$F(df)$	7.76 (2,18)	2.40 (2,18)	9.17 (2,18)
	P value	0.004*	0.119	0.002*
	η^2_p	0.46	0.21	0.51
Gear*Resistance*Crank	$F(df)$	0.73 (4,36)	1.86 (4,36)	1.64 (4,36)
	P value	0.576	0.140	0.184
	η^2_p	0.08	0.17	0.15

[†]Sphericity not assumed, Greenhouse-Geisser

*Significant at $P < 0.05$

References

1. Dallmeijer, A. J., Ottjes, L., de Waardt, E., & van der Woude, L. H. V. (2004). A physiological comparison of synchronous and asynchronous hand cycling. *International Journal of Sports Medicine*, 25(8), 622–626.
2. Hettinga, F. J., Valent, L. J., Groen, W., van Drongelen, S., de Groot, S., & van der Woude, L. H. V. (2010). Hand-cycling: An active form of wheeled mobility, recreation, and sports. *Physical Medicine and Rehabilitation Clinics of North America*, 21(1), 127–140.
3. Van Der Woude, L. H. V., Dallmeijer, A. J., Janssen, T. W. J., & Veeger, D. H. (2001). Alternative modes of manual wheelchair ambulation. *American Journal of Physical Medicine & Rehabilitation*, (October), 765–777.

Key words: Handcycling, mechanical efficiency, cadence, heart rate, oxygen consumption

✉Contact email: (Karsten)

¹ University of Groningen, University Medical Center Groningen, Center for Human Movement Sciences, Netherlands

² University of Münster, Institute of Sport Sciences, Department of Motion Science, Germany

³ University of Groningen, University Medical Center Groningen, Center for Rehabilitation, the Netherlands

